


Texrex™

OUT OF THE ORDINARY

Thank you for purchasing our product. Please take a couple of minutes to familiarise yourself with the product's correct use.

FITTING TO BICYCLE SADDLE RAILS

- Clip the side release buckle (A & B) open
- The Texrex label (C) should be on the bicycle's drivetrain side (right side of bicycle).
- Loop the side release buckle ends (A & B) over the saddle rails (D) and clip in.
- The strap must be tight when clipped in. If not, adjust tension at part "A" of the side release buckle and be sure to feed any slack in the webbing through part "E".
- Part "E" is critical – the strap's cut end must be fully thread through and extend by at least 20mm.

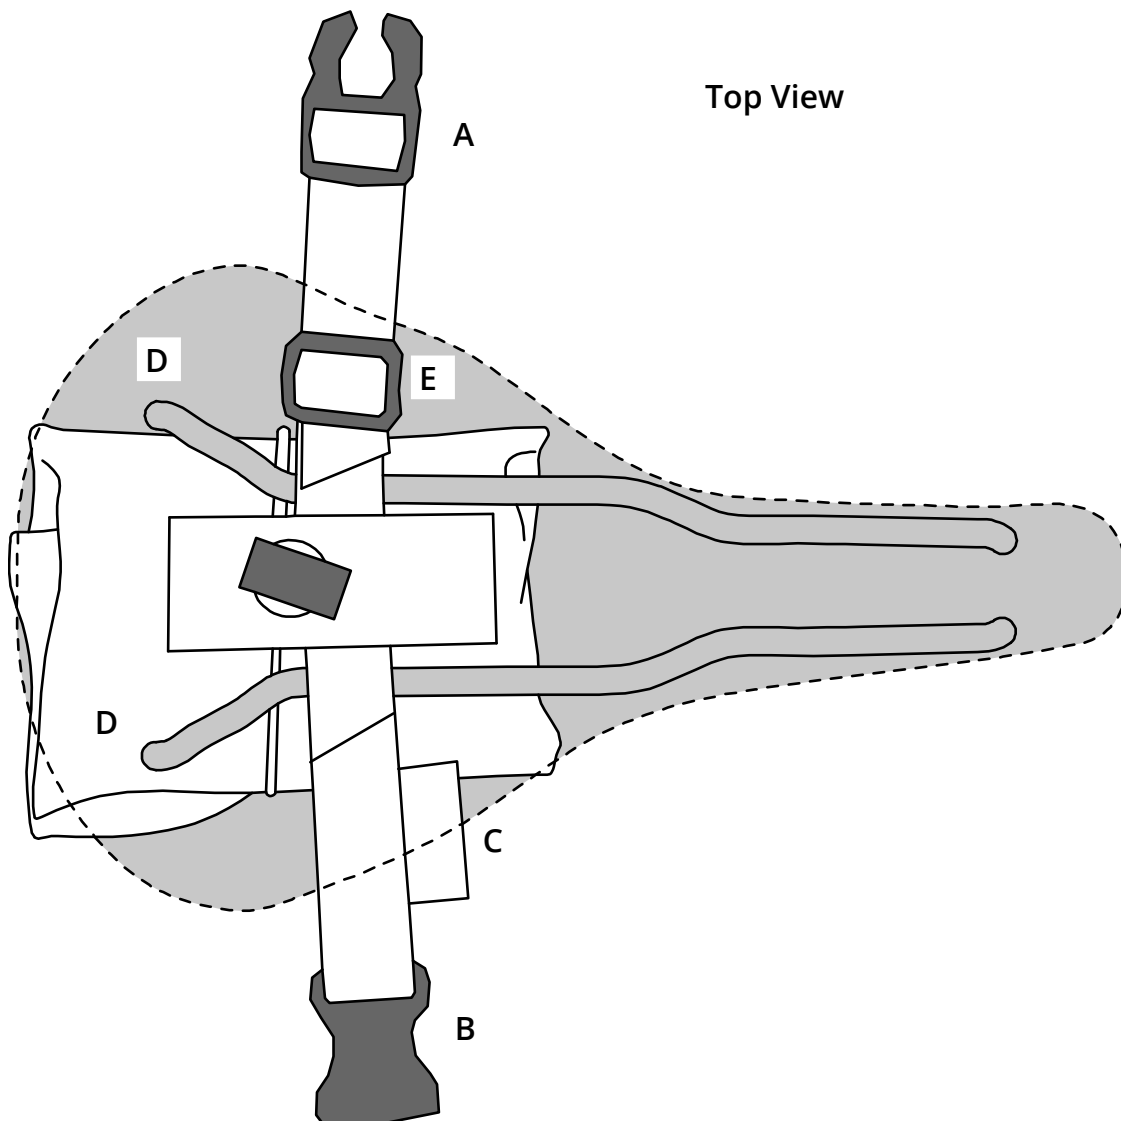

PACKING

- Larger tools/items pack best in the middle pocket, tubeless plug repair tools and tyre levers in the small right pocket and flat items in the left pocket. Experiment to find what works best for the tools you have.
- The pockets should conceal the items being packed.
- Stash smaller items (for example chain links and spare valve cores) inside a small zip lock bag.
- Closing the tool roll; fold the cover flap closed, fold the right pocket in followed by the left pocket. Slip the bungee cord over and adjust if need be.

CLEANING

- Dust may be brushed or shaken off.
- Wash with a soft brush and mild detergent. Use clean water to rinse off dirt and detergent. Allow to dry open in a sunny and well ventilated area.
- Contrary to popular belief; clean fabrics last longer as dirt is abrasive.

SAFETY

- This product may fail or detach while cycling causing damage(s), serious injury or death.
- Before use:
 - Inspect the product for damage and deterioration and do not use the product if faulty or unsafe.
 - Ensure that the product is correctly fitted and secure.
 - Check that the bicycle's operation has not been compromised (contact us if unsure or alternatively a professional bicycle mechanic may advise).